

1. MICROPHONE SPECIFICATIONS:

DIMENSION: $\Phi 9.7 \times 4.5(\text{mm})$

SENSITIVITY: $-45 \pm 3\text{db}$

DIRECTION: OMNIDIRECTIONAL

2. SPEAKER SPECIFICATIONS:

DIMENSION: $\Phi 23(\text{mm})$

IMPEDANCE: $32 \Omega \pm 15\%$

POWER RATING: NORMAL 0.2W. MAXIMUM 0.5W.

3. ENVIRONMENTAL SPECIFICATIONS:

OPERATING TEMPERATURE RANGE: $-40^{\circ}\text{C} \sim +80^{\circ}\text{C}$


STORAGE TEMPERATURE RANGE: $-45^{\circ}\text{C} \sim +85^{\circ}\text{C}$

4. CABLE SPECIFICATIONS:

CABLE DIAMETER: $\Phi 3.1+1\text{S}$ 、 $\Phi 1.9(\text{mm})$

MATERIAL: PU

DURABLE TEMPERATURE: $-45^{\circ}\text{C} \sim +85^{\circ}\text{C}$

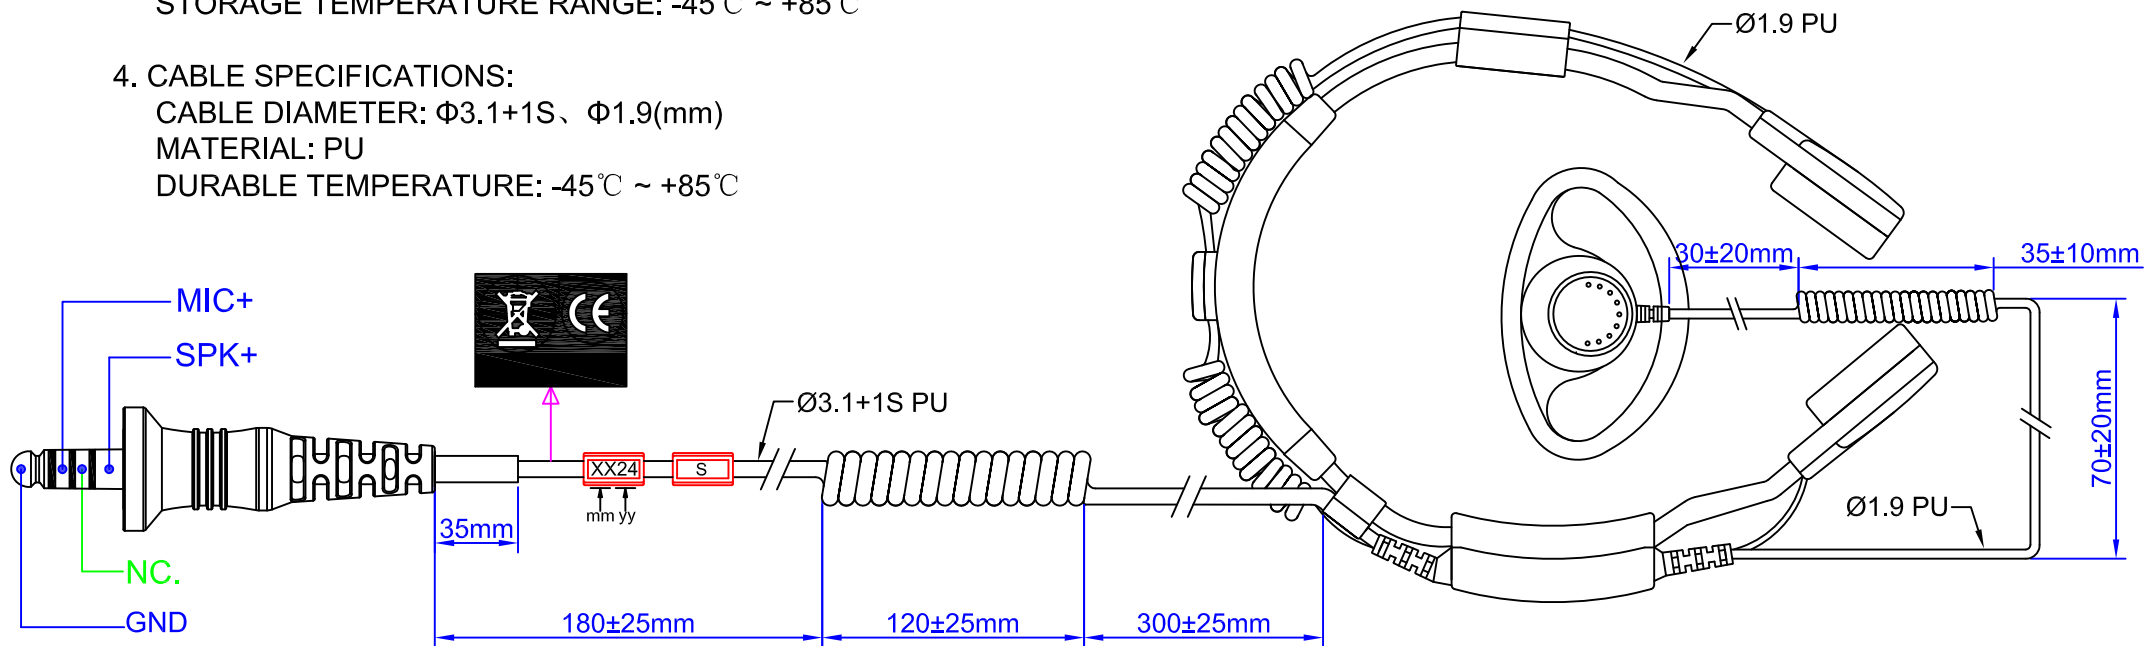

JA009

DRAWING NO.

S1-EM02.

DRWN. SKY

CHKD. DAVID

REV.

A

Customer P/N:

XTM02-12-S

DATE : 2024/08/12

SIZE

B

Sheet 1 OF 1